

Coaxial Cabling : Video Distributor & Video Amplifier Series

ITEM NO.: CD1632A 16 Input 32 Output Video Distribution Amplifier




CD1632A is video distribution Amplifier. 16 input, 32 outputs, each channel with 2 outputs. Each output built in Brightness and Sharpness adjustment. It takes 2U (3.5 inches) of space in standard 19" Rack. It's suitable for far distance, different floor in a building or different electrical field.


Features:

- Wide bandwidth, video gain compensation amplification.
- HF compensation.
- 10dB adjustable image gain.
- Sharpness and Brightness adjustment.
- Transmission range: 1000 meters (RG59 coaxial cable).
- It can be connected video camera, multiplexer, VCR, DVR...etc.
- Power supply included.

Panel View:

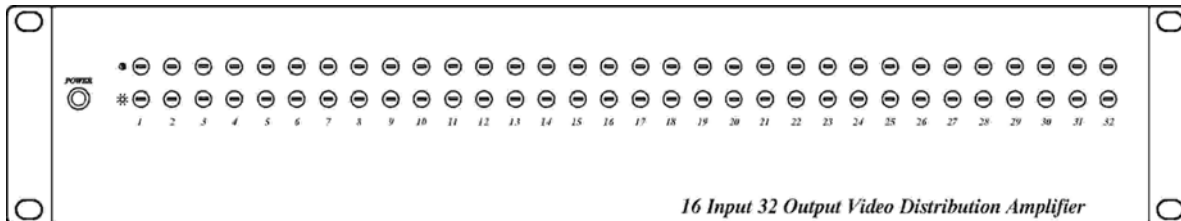

Installation View:

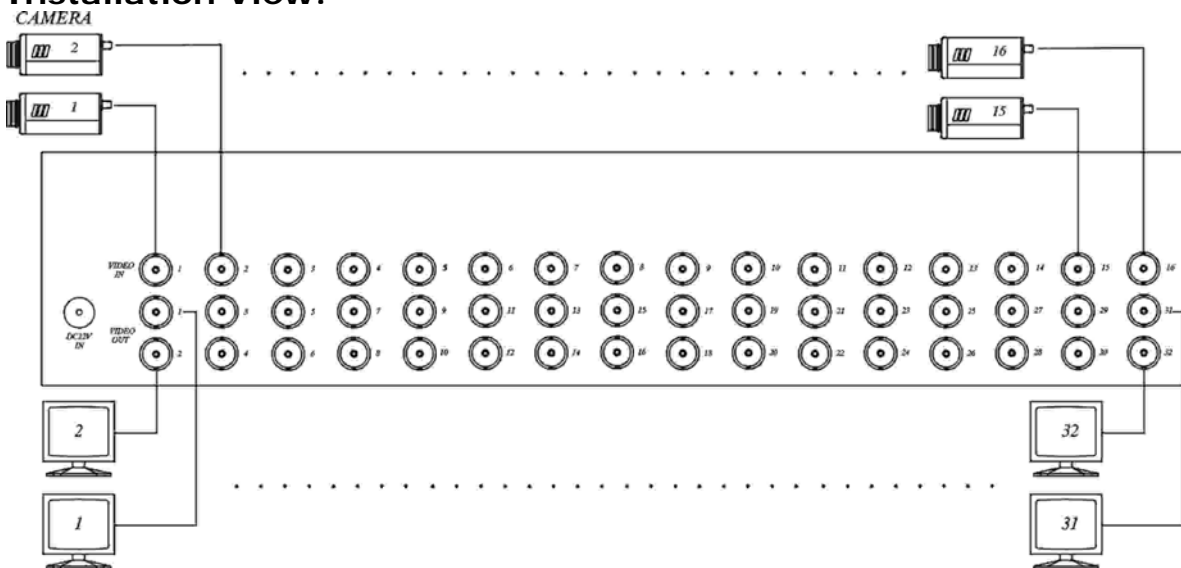

Specifications:

Item NO.	CD1632A
Video Input Channel	BNC x 16
Video Output Channel	BNC x 32
Video Input Level	0.8~1.2Vp-p, 75 Ohms
Video Bandwidth	10hz - 10MHz
Power Consumption	350mA
Power Supply	DC12V/500mA
Temperature	Operation: 0 to 55°C, Storage: -20 to 85°C, Humidity: up to 95%
Dimensions mm	483 x 62 x 88.4(2U)
Weight g	1610



Rev. B